# NEW PRODUCT INFORMATION


**Bulletin No. 1974** 


IP67 Hook Style Digimatic Depth Gage


#### **FEATURES**

- IP67 Waterproof rating.
- Digimatic SPC output.
- Stainless steel construction.
- Integral end hook, won't work loose.
- ABS scale, no need to rezero.
- Three year battery life.
- Inch/metric. Offset.
- Auto power On/Off.
- Convenient mounting holes in the base.
- Battery life 3 years under normal use.
- Optional wider extension bases are available.

The end of the main scale is hook shaped to allow depth and thickness measurements of a projected portion or lip in a hole or recess, in addition to standard depth measurement.










| Order No.  | Range Hook | Range Depth         | Resolution            | Accuracy | Output |
|------------|------------|---------------------|-----------------------|----------|--------|
| 571-264-10 | 6"/150mm   | .4"-6.4"/10mm-160mm | .0005"/0.01mm ±.0015" |          | Yes    |
| 571-265-10 | 8"/200mm   | .4"-8.4"/10mm-210mm | .0005"/0.01mm         | ±.0015"  | Yes    |

571-264-10

#### **DIMENSIONS**



#### **Optional Accessories**

Cables Order No. 40" SPC Cable 05CZA624 80" SPC Cable 05CZA625

#### **Extension Bases:**

7" Base 900367 10" Base 900368 12" Base 900369



## IP67 Rated Products - Superior Protection and Reliability

### **ABSOLUTE Digimatic Depth Gage**

#### **FEATURES**

- ABSOLUTE Digimatic Depth Gage can keep track of the origin point once set for the entire life of the battery.
- Base and measuring faces are hardened and micro-lapped.
- Optional wider extension base are available. (up to 450mm range models)





#### **SPECIFICATIONS**

#### Metric

| Range      | Order No.   | Resolution | Accuracy | Mass(g) |  |
|------------|-------------|------------|----------|---------|--|
| 0 - 150mm  | 571-201-20  | 0.01mm     | ±0.02mm  | 192     |  |
| 0 - 150mm  | 571-251-10* | 0.01mm     | ±0.02mm  | 199     |  |
| 0 - 200mm  | 571-202-20  | 0.01mm     | ±0.02mm  | 212     |  |
| 0 - 200mm  | 571-252-10* | 0.01mm     | ±0.02mm  | 219     |  |
| 0 - 300mm  | 571-203-20  | 0.01mm     | ±0.03mm  | 310     |  |
| 0 - 300mm  | 571-253-10* | 0.01mm     | ±0.03mm  | 320     |  |
| 0 - 450mm  | 571-204-10  | 0.01mm     | ±0.05mm  | 1270    |  |
| 0 - 600mm  | 571-205-10  | 0.01mm     | ±0.05mm  | 1400    |  |
| 0 - 750mm  | 571-206-10  | 0.01mm     | ±0.06mm  | 1530    |  |
| 0 - 1000mm | 571-207-10  | 0.01mm     | ±0.07mm  | 1760    |  |


<sup>\*</sup>IP67 Coolant Proof model

#### Inch/Metric

| Range                   | Order No.   | Resolution         | Accuracy | Mass(g) |
|-------------------------|-------------|--------------------|----------|---------|
| 0 - 6" /<br>0 - 150mm   | 571-211-20  | .0005" /<br>0.01mm | ±.001"   | 192     |
| 0 - 6" /<br>0 - 150mm   | 571-261-10* | .0005" /<br>0.01mm | ±.001"   | 199     |
| 0 - 8" /<br>0 - 200mm   | 571-212-20  | .0005" /<br>0.01mm | ±.001"   | 212     |
| 0 - 8" /<br>0 - 200mm   | 571-262-10* | .0005" /<br>0.01mm | ±.001"   | 219     |
| 0 - 12" /<br>0 - 300mm  | 571-213-10  | .0005" /<br>0.01mm | ±.0015"  | 310     |
| 0 - 12" /<br>0 - 300mm  | 571-263-10* | .0005" /<br>0.01mm | ±.0015"  | 320     |
| 0 - 18" /<br>0 - 450mm  | 571-214-10  | .0005" /<br>0.01mm | ±.002"   | 1270    |
| 0 - 24" /<br>0 - 600mm  | 571-215-10  | .0005" /<br>0.01mm | ±.002"   | 1400    |
| 0 - 30" /<br>0 - 750mm  | 571-216-10  | .0005" /<br>0.01mm | ±.0025   | 1530    |
| 0 - 40" /<br>0 - 1000mm | 571-217-10  | .0005" /<br>0.01mm | ±.0025   | 1760    |

<sup>\*</sup>IP67 Coolant Proof model

#### **DIMENSIONS**

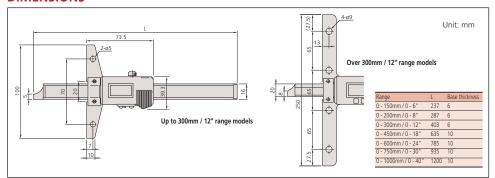

**Note:** All information regarding our products, and in particular the illustrations, drawings, dimensional and performance data contained in this printed matter as well as other technical data are to be regarded as approximate average values. We therefore reserve the right to make changes to the corresponding designs. The stated standards, similar technical regulations, descriptions and illustrations of the products were valid at the time of printing. In addition, the latest applicable version of our General Trading Conditions will apply. Only quotations submitted by ourselves may be regarded as definitive.

Mitutoyo products are subject to US Export Administration Regulations (EAR). Re-export or relocation of Mitutoyo products may require prior approval by an appropriate governing authority.

#### **Trademarks and Registrations**

Designations used by companies to distinguish their products are often claimed as trademarks. In all instances where Mitutoyo America Corporation is aware of a claim, the product names appear in initial capital or all capital letters. The appropriate companies should be contacted for more complete trademark and registration information.

We reserve the right to change specifications and prices without notice.

### Coordinate Measuring Machines

Vision Measuring Systems

Form Measurement

Optical Measuring
Sensor Systems

Testing Equipment and

Seismometer

Digital Scale and DRO Systems

Small Tool Instruments and Data Management

#### **Mitutoyo America Corporation**

www.mitutovo.com

One Number to Serve You Better 1-888-MITUTOYO (1-888-648-8869)

#### M<sup>3</sup>Solution Centers

Aurora, Illinois (Corporate Headquarters)

Westford, Massachusetts Huntersville, North Carolina Mason, Ohio Plymouth, Michigan

City of Industry, California

